



Connectors > Circular Connectors > Standard Circular Connectors



Number of Positions: 3

Connector System: **Wire-to-Wire**

Sealable: **Yes**

Shell Plating Material: **Black Zinc**

Shell Base Material: **Aluminum Alloy**

## Features

### Product Type Features

Connector Product Type	Connector Assembly
Assembly Type	Electrical Connector
Connector System	Wire-to-Wire
Sealable	Yes
Circular Connector Type	Receptacle
Shell Type	Metal

### Configuration Features

Factory Installed Backshell	No
Number of Positions	3
Contacts Preloaded	No

### Body Features

Entry Style	Rear Insertion
Environmental Protection	With
Environmental Protection Type	Sealed
Feedthrough Type	No
Shell Plating Material	Black Zinc
Shell Base Material	Aluminum Alloy



Circular Connector Insulation Material Type	Hard Dielectric/Silicone
---	--------------------------

Hermetically Sealed	No
---------------------	----

### Contact Features

Contact Quantity (Size 20)	3
----------------------------	---

Contact Layout Arrangement	8 – 98
----------------------------	--------

Circular Connector Contact Type	Socket
---------------------------------	--------

### Mechanical Attachment

Mating Retention Type	Bayonet Peg
-----------------------	-------------

Panel Mount Feature Type	2 Hole Flange
--------------------------	---------------

Mating Alignment	With
------------------	------

Polarization Code	A
-------------------	---

Mating Alignment Type	Keyed
-----------------------	-------

Mating Retention	With
------------------	------

### Housing Features

Circular Connector Shell Size	8
-------------------------------	---

### Dimensions

Assembly Length	33.5 mm
-----------------	---------

Wire Size	20 AWG
-----------	--------

### Usage Conditions

IP Dust Sealing Level	6
-----------------------	---

IP Water Sealing Level	7
------------------------	---

Fluid Resistance	Immersion
------------------	-----------

Operating Temperature Range	-55 – 175 °C[-67 – 347 °F]
-----------------------------	----------------------------

### Operation/Application

Durability Rating	500 Cycles
-------------------	------------

### Other

Field Serviceable	Yes
-------------------	-----

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
------------------------------	---------------------------

EU ELV Directive 2000/53/EC	Compliant with Exemptions
-----------------------------	---------------------------



China RoHS 2 Directive MIIT Order No 32, 2016

EU REACH Regulation (EC) No. 1907/2006	Restricted Materials Above Threshold
	Current ECHA Candidate List: JUNE 2024 (241)
	Candidate List Declared Against: JAN 2024 (240)
	SVHC > Threshold:
	Pb (1.2% in Contact)
	Pb (.4% in Shell - alloy)
	<b>Article Safe Usage Statements:</b> Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.


Halogen Content

Solder Process Capability	Not Yet Reviewed for halogen content
	Reflow solder capable to 245°C


**Product Compliance Disclaimer**

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts

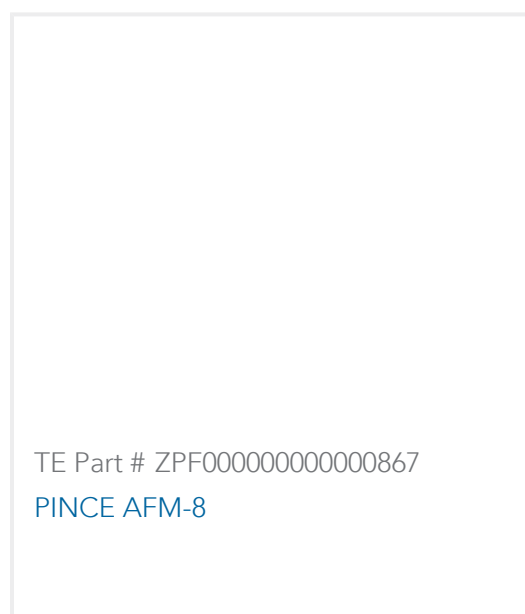

## Also in the Series | DEUTSCH AS Standard

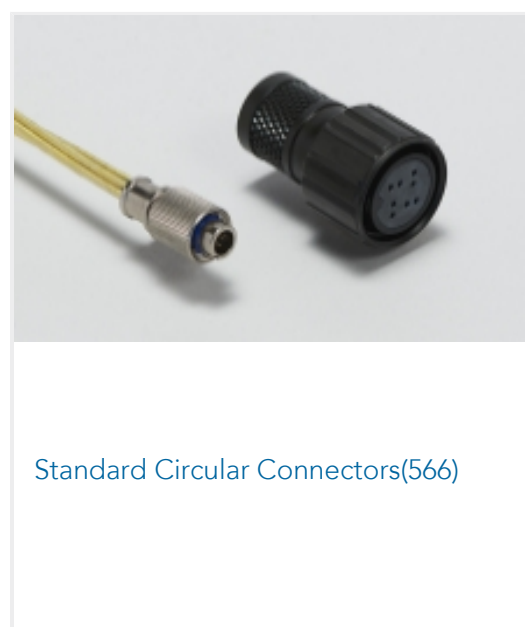

## Customers Also Bought



TE Part #AS008-35SD  
RECEPT.2 HOLE MNT.TYPE 0



TE Part #AS614-97PN  
PLUG BOOT TERMINN TYPE 6



TE Part #AS622-21PN  
PLUG BOOT TERMIN TYPE 6



TE Part #AS612-35PA  
PLUG BOOT TERMIN'N TYPE 6



TE Part #AS616-08PA  
PLUG BOOT TERMIN'N TYPE 6



TE Part #AS608-98PA  
PLUG BOOT TERMIN'N TYPE 6



TE Part #AS608-98PD  
PLUG BOOT TERMIN'N TYPE 6



TE Part #AS008-98SN  
RECEPT.2 HOLE MNT.TYPE 0



TE Part #AS020-41SA  
RECEPT.2 HOLE MNT TYPE 0



TE Part #AS608-98PN  
PLUG BOOT TERMINN TYPE 6

## Documents

### Product Drawings

[RECEPT.2 HOLE MNT.TYPE 0](#)

English

### Datasheets & Catalog Pages

[AS Micro Xtra Lite HE](#)

English

[DEUTSCH Autosport Interconnection Solutions](#)

English