



Connectors > Circular Connectors > Standard Circular Connectors



Connector System: **Wire-to-Wire**

Number of Positions: **100**

Shell Plating Material: **Black Zinc**

Shell Base Material: **Aluminum Alloy**

Polarization Code: **N**

Features

Product Type Features

Product Type	Connector
Assembly Type	Electrical Connector
Connector System	Wire-to-Wire
Circular Connector Type	Plug
Shell Type	Metal

Configuration Features

Factory Installed Backshell	No
Keying	Key Polarization N
Number of Positions	100
Contacts Preloaded	No

Body Features

Environmental Protection	With
Feedthrough Type	No
Environmental Protection Type	Sealed
Entry Style	Rear Insertion
Shell Plating Material	Black Zinc
Shell Base Material	Aluminum Alloy
Circular Connector Insulation Material Type	Hard Dielectric/Silicone

Hermetically Sealed	No
---------------------	----

Contact Features

Contact Quantity (Size 22D)	79
Contact Layout Arrangement	22 – 35
Circular Connector Contact Type	Pin

Mechanical Attachment

Mating Retention Type	Coupling Ring
Mating Alignment	With
Polarization Code	N
Mating Alignment Type	Keyed
Mating Retention	With

Housing Features

Circular Connector Shell Size	22
-------------------------------	----

Dimensions

Assembly Length	33.5 mm
Wire Size	22 AWG

Usage Conditions

Fluid Resistance	Immersible
IP Dust Sealing Level	6
IP Water Sealing Level	7
Operating Temperature Range	-55 – 175 °C

Operation/Application

Durability Rating	500 Cycles
-------------------	------------

Other

Field Serviceable	Yes
-------------------	-----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2022
(224)

Candidate List Declared Against: JUN 2020
(209)

SVHC > Threshold:
Pb (1.2% in Contact)

Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Not Yet Reviewed for halogen content


Solder Process Capability

Reflow solder capable to 245°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

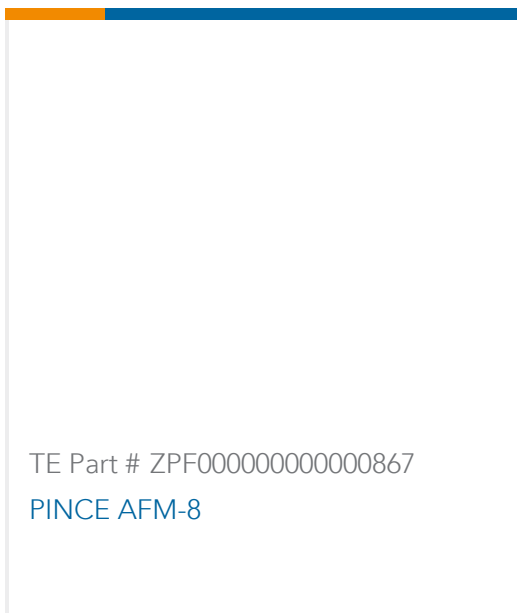

Also in the Series | DEUTSCH AS Standard

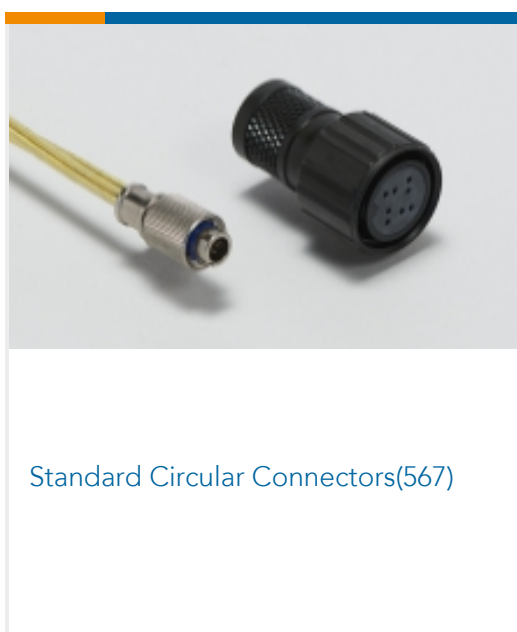

Documents



Product Drawings

[PLUG BOOT TERMIN'N TYPE 6](#)

English

Datasheets & Catalog Pages

[AS Micro Xtra Lite HE](#)

English